


12±0.2

L±1


5.6±0.2

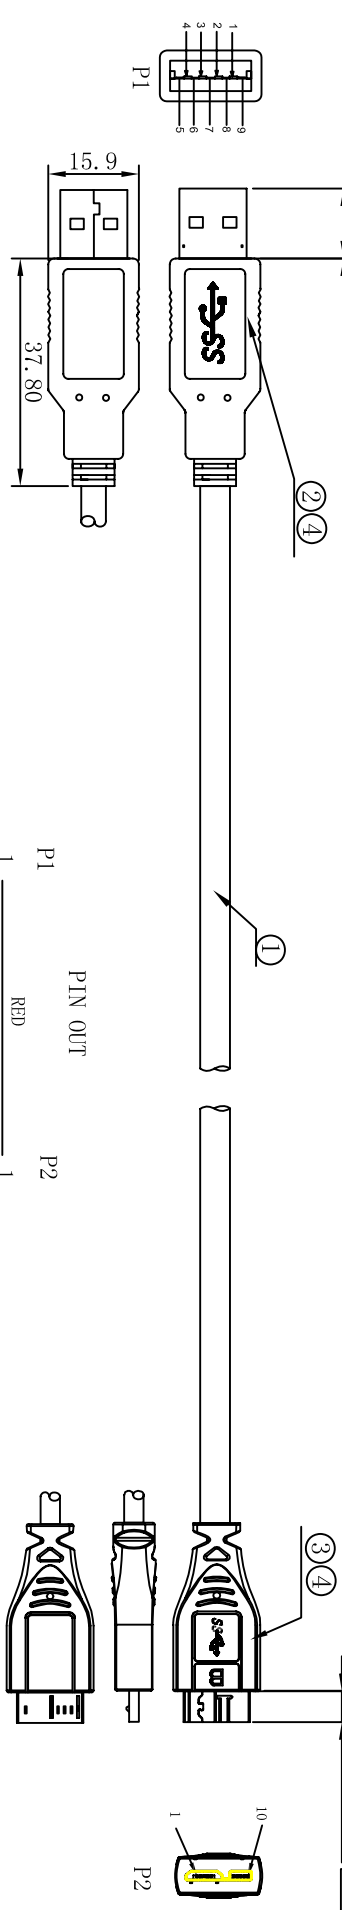


ITEM	LENGTH	EAN CODE	PACKING
S215310	1000±30MM	4038816224668	SYNERGY 21 A Bag
S215311	2000±50MM	4038816224675	SYNERGY 21 A Bag
S215312	3000±70MM	4038816224682	SYNERGY 21 A Bag

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10MΩ ;
 - Contact resistance:3Ω Max;
 - Dielectric strength:150V AC/Minute, 1mA.
- Rohs compliant
 3. PRINTING:AWM 80°C 30V VW-1 USB 3. 0 SUPER SPEED CABLE
 4. PACKING:SYNERGY 21 PE BAG+LABEL

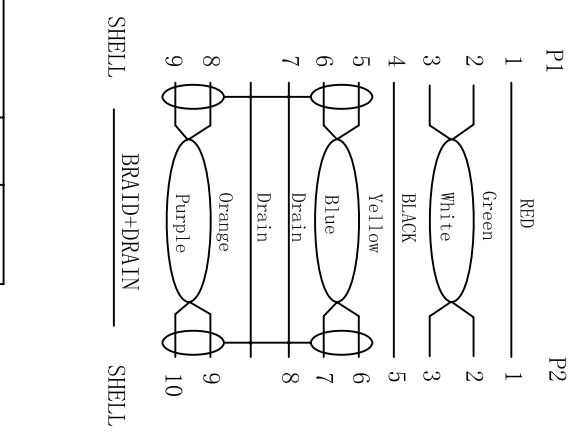

⑦	PE BAG	SYNERGY 21 SLIP PE BAG		
⑥	LABEL	NO DRY GLUE LABEL		
⑤	MINI TIE	Black		
④	OUTER MOLD	color For BLACK	2	
③	USB B TYPE	USB3. 0 MICRO B/M 10PIN Solder Type,Black PBT Insulation, The Pin Gold Plating;	1	
②	USB A TYPE	USB3. 0 A/M 9PIN Solder Type,Blue PBT Insulation,The Pin Gold Plating;	1	
①	CABLE	USB3. 0(7/0. 12BC*1P+DRAIN/7. 0. 12BC+PAM)*2PCS+7/0. 12TC*2C+7/0. 12TC*1P+PILLER AL-FOIL+7/0. 12TC+128/0. 12AL-MG, JACKET:PVC/BLACK 0D5. 0±0. 2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARK

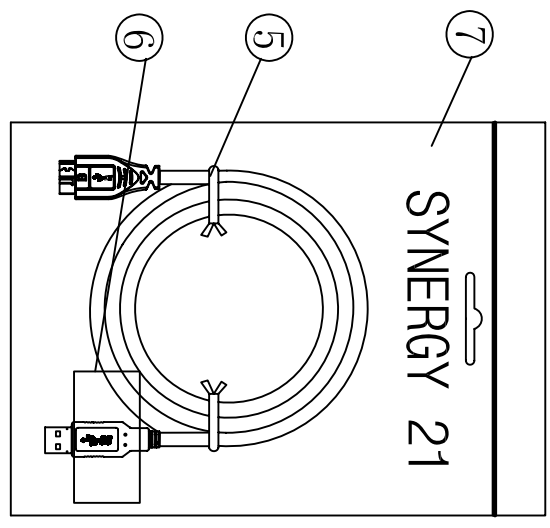

SYNERGY 21				
CUSTOMER	REF.	ITEM NO.	See The Chart	
PRODUCT NAME: USB 3. 0 AM/MICRO BM		CHINA	UNIT	MM

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	DATE
		NEW	2010-12-28	A	DRAWNBY	CHECKBY	APPROVE	2010-12-28