


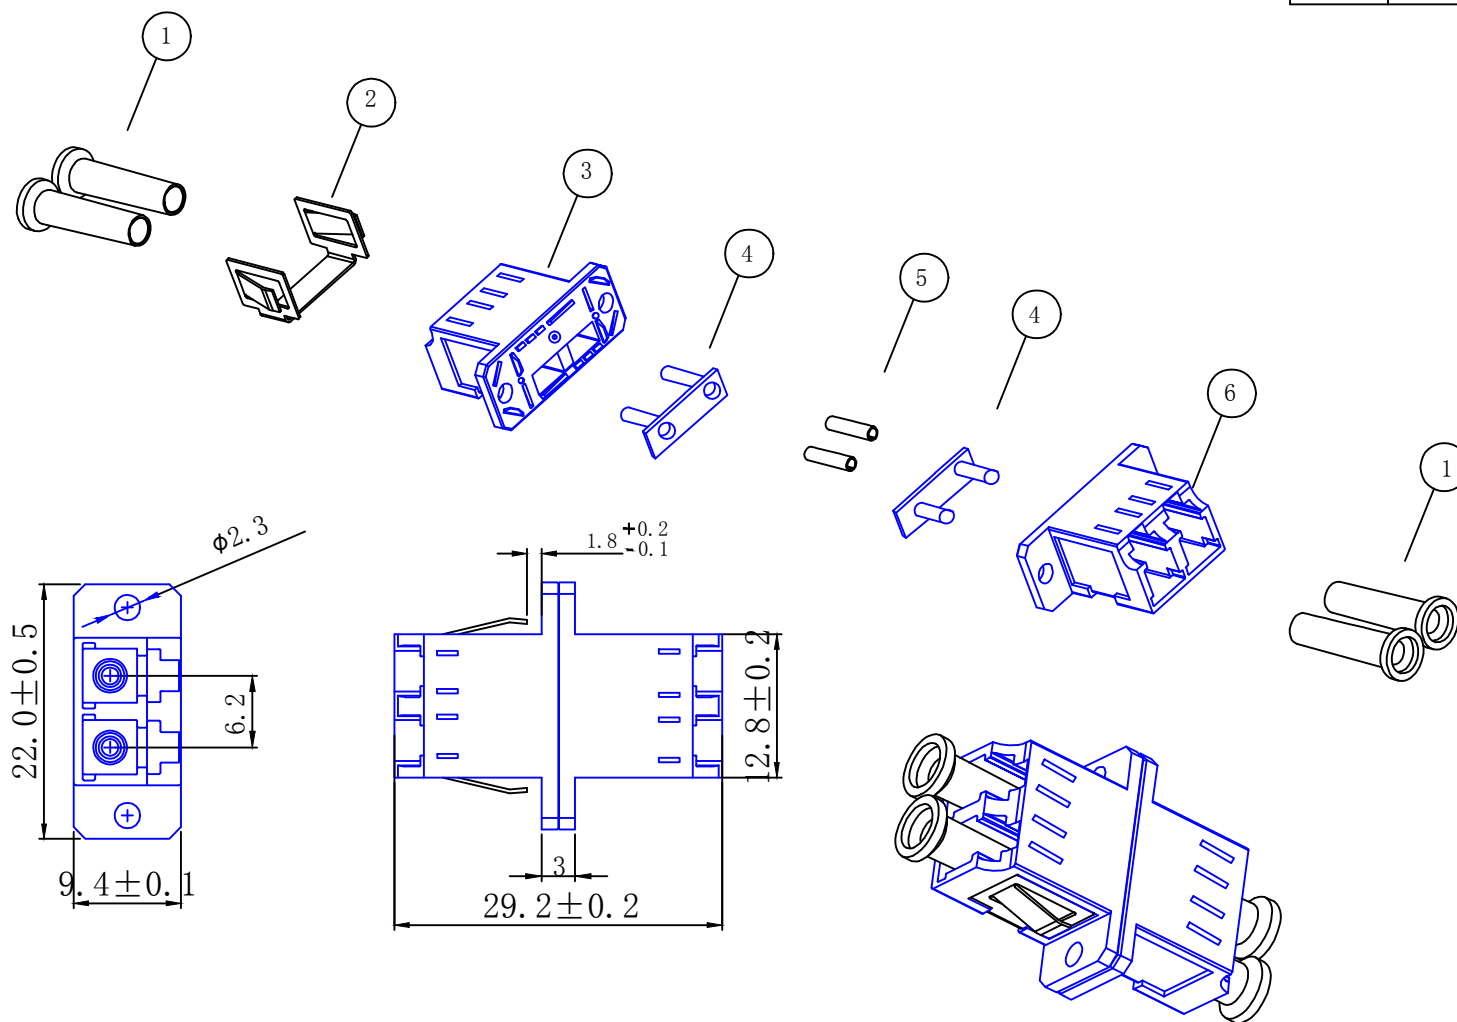

NOTE:
RoHS 2.0 & Reach COMPLIANT

Insertion Loss (typical) (dB)	≤0.12
Insertion Loss(dB)	≤0.20
Operating Temperature(° C)	-40 ~+80
Storage Temperature(° C)	-40 ~+85

PACKING:1PC/PE BAG + TEST REPORT +LABEL

MATERIAL LIST:

⑥	LC Blue Body (SC simplex footprint)	1pcs	
⑤	LC Sleeve ceramic(Single-Mode)	1pcs	
④	Blue bush	2pcs	
③	LC Blue Body (SC simplex footprint)	1pcs	
②	LC Metal Mount	1pcs	
①	LC White Dust Cap	4pcs	
NO.	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2016-11-18	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SYNERGY 21						
CUSTOMER			ITEM NO.	S215426		
PRODUCT NAME	LC SM(ceramic)Duplex Plastic Adapter(SC SX Footprint)	manufacture country	CHINA	UNIT	MM	
DRAWNBY	CHECKBY	APPOBY	DATE			
SYNERGY 21	SYNERGY 21	SYNERGY 21	2016-11-18			