


GREY	
ITEM NO.	LENGTH
K5255. 0, 5	500±5mm
K5255. 1	1000±10mm
K5255. 1, 5	1500±15mm
K5255. 1, 8	1800±18mm
K5255. 3	3000±30mm
K5255. 5	5000±50mm

4	CONNECTOR	USB B TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR	1 Set
3	CABLE	28AWG*1P+24AWG*2C+AL+B USB2. 0 HIGHSPEED CABLE JACKET: PVC/GREY OD: 4. 5±0. 2mm	1
2	OVERMOLD	PVC COLOR: GREY	10g
1	CONNECTOR	USB A TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR	1 Set
NO.	MAT. NAME	DESCRIPTION	Q' TY

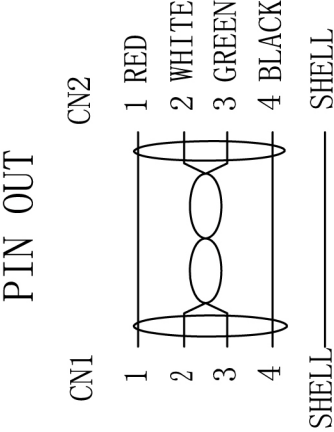

NOTE:

- 1. PRINTING: AWM 80° C 30V VW-1 28AWGx1P
24AWGx2C USB2. 0 HIGHSPEED CABLE
- 2. RoHS compliant.
- 3. Operating Temperature: -15℃-80℃